


Installation Instructions

- 1) Select the location for the Address Sign in an easy to drill spot (recommended on the front exterior garage wall) with easy access to an electrical outlet in the interior.
- 2) Place Address Sign against the wall at the desired location and mark the left and right top corners (make sure you have 2" of space to each side for maneuvering the sign into the wall).
- 3) Remove address sign and using a "level" draw a horizontal line 1" below the marks you made (10 ½" long for 10 ½" mount, 14" long for the 14" mount and 17" for 17" mount).
- 4) Mark 2 x's on the level line, (9 ½" long for 10 ½" mount, 13" apart for 14" mount, and 16" apart for 17" mount), then screw in the 2 corner brackets into the x's (fig 1). 5) Drill a feed-through hole half an inch diagonally below the left hand corner bracket (fig 1).

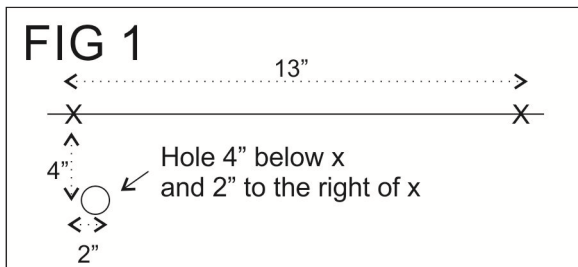

- 6) Feed power wire through hole from the exterior to the interior wall, and hang up sign by removing white side caps and slotting one side of the aluminum mount into one of the corner brackets, then slotting the other side in.
- 7) Tighten sign onto corner brackets by holding a straight screwdriver against the nut inside the aluminum mounting bracket whilst tightening the screw with a Philips screwdriver, then slot the white caps back in.
- 8) If you are attaching to mains and your mains wire is not 12v, screw l.e.d driver to interior wall and attach power wire from sign to it then attach it to mains wires (using an electrician).

If you are using a plug in adaptor, route power wire toward electrical outlet. Secure wire to the interior wall and plug in adapter.

For question please contact My lit address 732 267 4643

www.mylitaddress.com

Email: yossi@mylitaddress.com

Enjoy your product

